



SEATTLE LED LINEAR VANITY (Page 1)

MEUBLE LAVABO LINÉAIRE À DEL SEATTLE (Page 4)

LUZ LED LINEAL DE TOCADOR SEATTLE (Página 7)

To Begin/Pour commencer/Para comenzar





Ⓔ WARNING: Please read this entire manual before installation.

Verify the following contents:

Ⓕ AVERTISSEMENT : Veuillez lire ce mode d'emploi du début à la fin avant de commencer l'installation. Vérifiez le contenu suivant :

Ⓗ ADVERTENCIA: Por favor, lea este manual completo antes de realizar la instalación. Verifique el siguiente contenido:

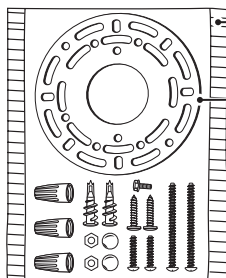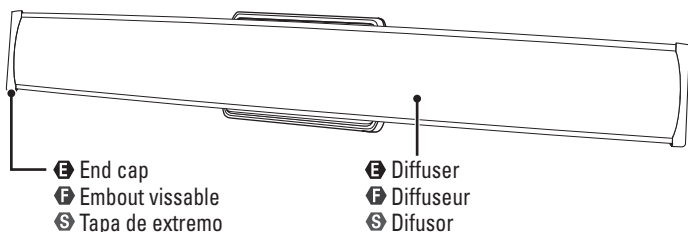

- Ⓔ Hardware kit*
- Ⓕ Kit de petit matériel de fixation*
- Ⓗ Kit de herrajes*
- Ⓔ Mounting bracket
- Ⓕ Support de montage
- Ⓗ Soporte de montaje



* Actual hardware may differ from illustration

* Les éléments de fixation réels peuvent être différents de ceux de l'illustration.

* Los herrajes reales pueden diferir de los que se muestran en la ilustración

Required/Nécessaire/Se necesita

Installation time: 45 minutes

Durée de l'installation : 45 minutes

Tiempo de instalación: 45 minutos



- Ⓔ Phillips screwdriver
- Ⓕ Tournevis à pointe cruciforme
- Ⓗ Destornillador Phillips



- Ⓔ Safety glasses
- Ⓕ Lunettes de sécurité
- Ⓗ Anteojos de seguridad



- Ⓔ 3/16 in. Drill bit
- Ⓕ Mèche de perceuse de 3/16 po
- Ⓗ Broca taladradora de 3/16 de pulgada



- Ⓔ Drill
- Ⓕ Perceuse
- Ⓗ Taladro



- Ⓔ Electrical tape
- Ⓕ Ruban électrique
- Ⓗ Cinta aislante



- Ⓔ Step ladder
- Ⓕ Escabeau
- Ⓗ Escalera de mano



- Ⓔ Soft cloth
- Ⓕ Chiffon doux
- Ⓗ Paño suave



- Ⓔ Level
- Ⓕ Niveau
- Ⓗ Nivel

English

Warnings and Cautions

WARNING

- Shut off power at the circuit breaker or fuse panel before removing the old fixture or installing the new one.
- LEDs can be damaged by electrostatic discharge (ESD) shock. Before installation, discharge yourself by touching a grounded bare metal surface to remove this hazard. To avoid damage, do not remove the clear lens over the LED module.

CAUTION

- This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Important Safety Instructions

WARNING: To reduce the risk of FIRE, ELECTRIC SHOCK, OR INJURY TO PERSONS:

1. Shut off power at the circuit breaker or fuse panel before removing the old fixture.
2. For INDOOR USE ONLY.
3. Do NOT touch, operate, or install fixture while in contact with water.
4. Do NOT use in wet locations.
5. Do NOT touch LEDs.
6. Do NOT remove the protective clear LED lens.
7. Do NOT look directly at lighted LEDs for any length of time.
8. Do NOT leave bare wires exposed outside the electrical box.
9. For electrical requirements, see back of the fixture. Minimum 90° supply conductors.

SAVE THESE INSTRUCTIONS IN A LOCATION CLOSE TO THE FIXTURE TO REFER TO THEM AT A LATER TIME.

Dimmer Instructions

THIS FIXTURE IS DIMMABLE BY SPECIFIC FORWARD PHASE ELECTRONIC (TRAIC) DIMMERS AND IS NOT COMPATIBLE WITH 0-10V DIMMING SYSTEMS. Dimmers tested to be compatible with this fixture are the Lutron: Diva® C•L™: DVWCL-153PH, Lumea® C•L™: LGCL-153PLH, and Toggler® C•L™: TGCL-153PH. (This list of dimmers does not imply any guarantee or warranty of compatibility with a particular application. Dimmers not listed do not imply non-compatibility.)

Installation

1

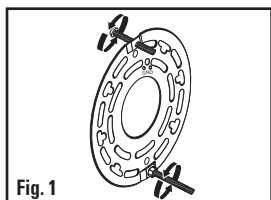


Fig. 1

Screw the two long machine screws into the threaded holes on the backside of the mounting bracket. On the front side of the mounting bracket labeled "GND" secure the hex nuts onto the screws until they are flush with the mounting bracket (Fig. 1).

2

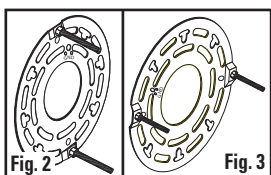


Fig. 2

Fig. 3

For a horizontal installation: The protruding machine screws must be perpendicular to the floor (Fig. 2).

For a vertical installation: The protruding machine screws must be parallel to the floor (Fig. 3).

3

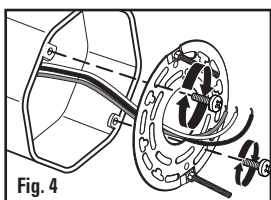


Fig. 4

Hold the mounting bracket (with "GND" facing forward) up to the electrical box and pull the wires through the center opening of the mounting bracket. Use the short machine screws to attach the mounting bracket flush to the electrical box (Fig. 4). **NOTE:** If necessary, the elongated slots in the mounting bracket may be utilized to achieve the correct orientation for the installation.

4

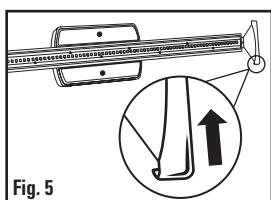


Fig. 5

For a horizontal installation make sure the closed catches on the endcaps are on the bottom to prevent the diffuser from falling out of the end caps (Fig. 5). For vertical installations the orientation of the catches does not apply.

5


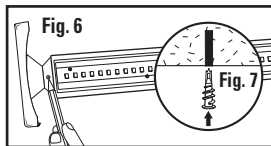


Fig. 6


Fig. 7

Position the fixture over the long machine screws protruding from the electrical box and level off the fixture. Once level hold the fixture in place and mark the locations of the mounting holes at both ends of the fixture (Fig. 6). Drill a 3/16 in. pilot hole or use an awl or nail to dimple the marked locations. Screw the drywall anchors into the marked locations until they are flush with the surface of the drywall (Fig. 7).


Installation

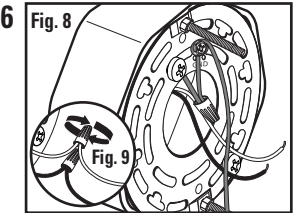


For safety, and proper operation, the fixture must be properly grounded. If unfamiliar with the methods for properly grounding the fixture and mounting bracket, consult a qualified electrician. If the electrical box is non-grounded, or plastic, connect the fixture green/copper ground wire to the green/copper ground wire from the electrical box with a wire nut. Then make a loop with the ground wire and secure it to the mounting bracket with the grounding screw (**Fig. 8**). If the electrical box is metal and grounded, attach the green/copper ground wire from the fixture to the mounting plate using the grounding screw. Once properly grounded, connect the supply leads from the electrical box to the fixture wire leads using the wire nuts. The black leads from the fixture connect to the black supply lead, and the white fixture lead connect to the white supply lead. Tighten the wire nuts properly to prevent the wire from coming loose (**Fig. 9**). If unsure of the tightness, secure the wire nuts using electrical tape.

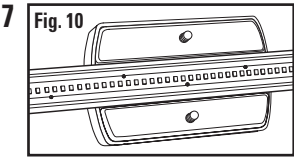


Carefully push any excess wires into the back plate. Position the fixture over the electrical box so the machine screws protruding from the mounting bracket pass through the holes in the back plate of the fixture (**Fig. 10**). Make sure none of the wires are pinched between the back plate and the wall.

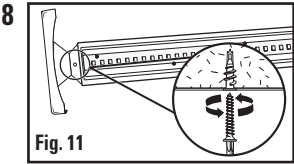

While holding the fixture in line with the previously installed drywall anchors, screw both wood screws into the drywall anchors (**Fig. 11**). **NOTE:** Make sure the fixture is level before fully tightening the wood screws.

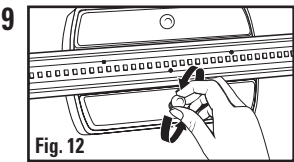

Secure the fixture to the electrical box with the screw caps (**Fig. 12**). The back plate should be tight against the wall surface.

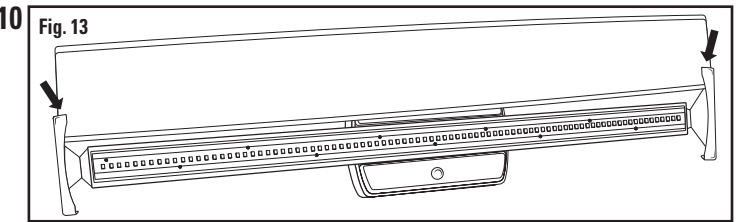

Carefully start both edges of the diffuser into the open side of the end cap. **NOTE:** If the diffuser does not fit (or there is too much space) then adjust the end caps by carefully bending them in or out as needed. Once both ends of the diffuser are set in the openings of the end caps carefully push/pull the diffuser into place until it is securely seated in the closed catches (**Fig. 13**).

Troubleshooting Guide

Minor problems often can be fixed without the help of an electrician. Before doing any work on the fixture, shut off power supply at the circuit breaker panel to avoid electrical shock.

Problem	Cause	Solution
Fixture doesn't light.	Power is off.	Check if power supply is on.
	Bad connection.	Check cords and/or wiring.
	Bad switch.	Test or replace switch.
Fuse blows or circuit breaker trips when light is turned on.	Discontinue use.	Call customer service.

Care and Maintenance

IMPORTANT: This light fixture uses light emitting diodes (LEDs) to provide light. LEDs do not have a filament to burn out like a traditional light bulb. LEDs gradually emit less light over their lifetime, but will typically last 50,000 hours in a residential environment.

Periodically clean the fixture and diffuser using a mild, non-abrasive cleaner and soft cloth. When cleaning the fixture, make sure the power is turned off. Do not spray cleaner directly onto any part of the fixture or LEDs.

Need Help?



In the event you are missing a part or have questions regarding installation please visit our website at www.goodearthlighting.com/support or call the Customer Care Center **1-800-291-8838**, 8:30 a.m.-5 p.m., CST, Monday-Friday.



Good Earth Lighting® Warranty

10 YEAR LIMITED WARRANTY

The manufacturer warrants this lighting fixture to be free from defects in materials and workmanship for a period of (10) years from the date of original purchase by the consumer. The fixture is not warranted for use in a commercial or retail application. The warranty is limited to use in a residential environment. We will repair or replace (at our option) the unit in the original color and style if available, or in a similar color and style if the original item has been discontinued, without charge. Defective units must be properly packed and returned to the manufacturer with a letter of explanation and your original purchase receipt showing date of purchase. Call **1-800-291-8838** to obtain a return authorization number and an address where to ship your defective product. Note: C.O.D. shipments will NOT be accepted. The liability of the manufacturer is in any case limited to replacement of the defective light fixture product. The manufacturer will not be liable for any other loss, damage, labor costs or injury which is caused by the product. This limitation upon the liability of the manufacturer includes any loss, damage, labor costs or injury which is (I) to person or property or otherwise; (II) incidental or consequential in nature; (III) based upon theories of warranty, contract, negligence, strict liability, tort, or otherwise; or (IV) directly, or indirectly related to the sale, use, or repair of the product. This warranty gives you specific rights, and you may also have other rights which vary from state to state.

Good Earth Lighting® 1400 East Business Center Drive, Ste. 108 Mount Prospect, IL 60056

Good Earth Lighting® is a registered trademark of Good Earth Lighting, Inc.

Printed in China